
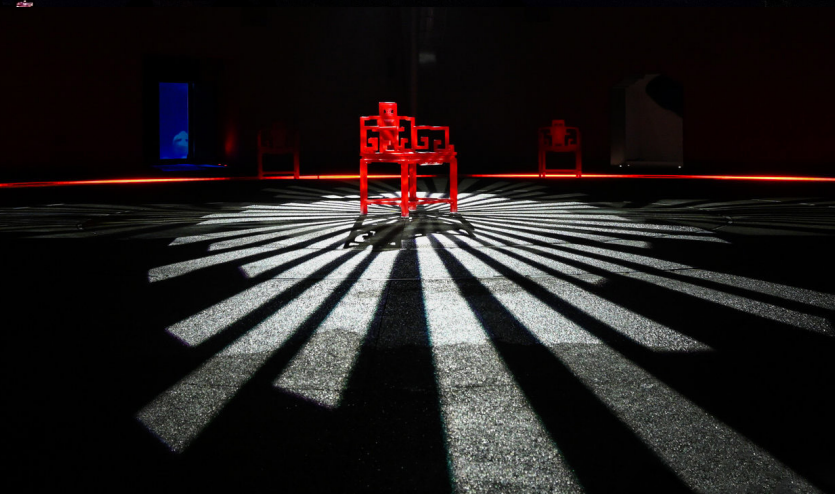


LT6

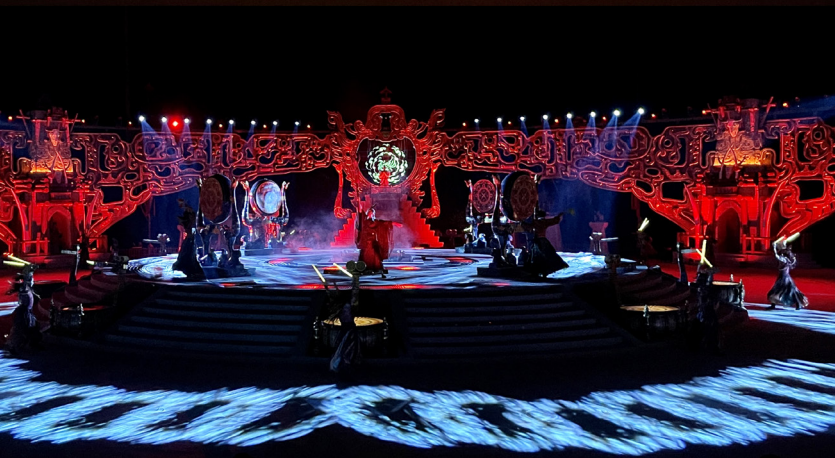

Outdoor LED Profile Moving Head Light

Beam, Spot, Wash, Profile Included

- 600W LED light source
- Up to 26500lumen output
- Adjustable color temperature 6000K–6200K
- CW+CMY/CTO+Color wheel system for rich color mixing
- Razor sharp shutter framing and clear beam projection
- Evenly wash field from center to edge
- Flawless SPWM technology to reach true 16bit dimming
- Smooth and accurate mechanical movement control
- DMX512/RDM/sACN/A tnet/CRMX/Bluetooth/APP/NFC
- Weather-resistant IP66 tour-grade construction


Color System



Rotating Gobo



Fixed Gobo

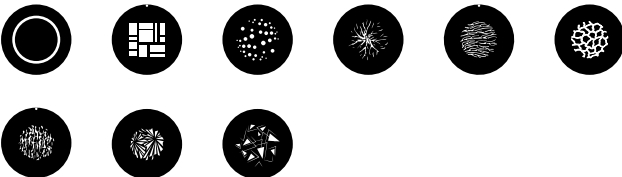


Frame Shutter



Animation




Beam Angle 3.3°

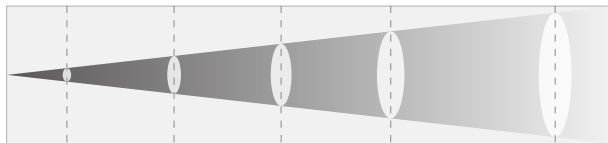

Distance (m)	5	10	15	20	25
Illuminance (Lux)	158000	39500	17555	9875	6320

Beam Angle 52°

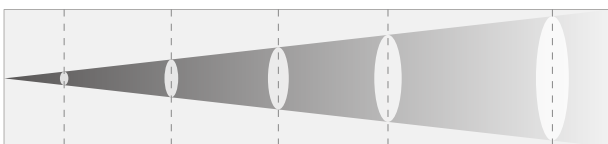

Distance (m)	5	10	15	20	25
Illuminance (Lux)	2025	506	225	126	81

PHOTOMETRICS

Light Source	600W LED
Output	26500Lm
Color temperature	6000K~6200K
CRI	> 70
LED Life	20000H
Beam Angle	3.3~52°

KEY FEATURES

PAN	540° (16bit)
TILT	270° (16bit)
Color System	CW+CMY/CTO+Color Wheel(6+open)
Gobo System	Rotating gobo wheel (7 gobos+open) Fixed gobo wheel (9 gobos+open)
Animation	Animation wheel with variable speed
Framing System	Single blade ±35° , rotatable ±60°
Iris	15 fins, 3%– 100% motorized linear iris
Frost	1° /5° 0~100% frost
Strobe	1~30Hz
Dimming	0~100% , 4 dimming curves
Prism	Bi-directional variable-speed 4-facet + linear prism

CONTROL

Protocol	DMX512/RDM/sACN/Artnet/CRMX/Bluetooth/APP/NFC
DMX Channel	35CH
Display	2.8 inch TFT display

POWER

Mains	100 – 240 VAC, 50/60 Hz
Power Connections	Power In/Out, linking up to 2pcs
Data Connections	DMX In/Out, Linking up to 32pcs
Consumption	800W /230V
Power Factor	0.95/230V
Ambient	-20℃~50℃

PHYSICAL

Dimension	429 x 270 x 661 mm
Weight	30.5kg
IP Rating	IP66
Cooling	Heat pipe and low noise IP fan
Accessory	Power cable, data cable, Omega Bracket

