


TERMINATOR

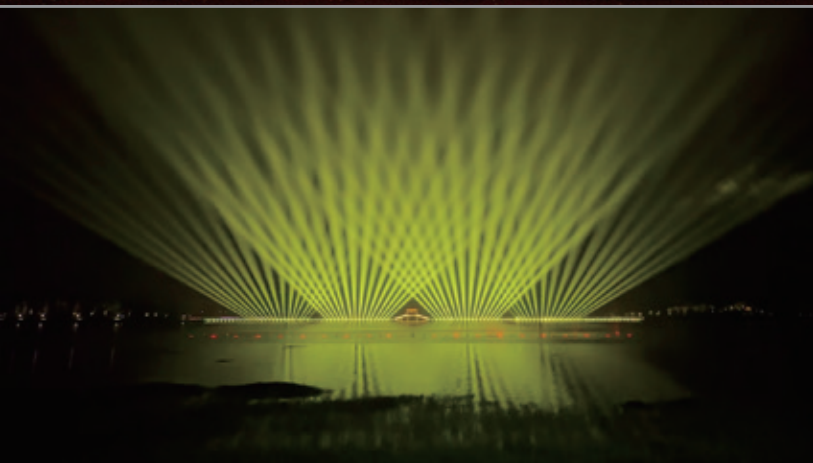

660W OUTDOOR MOVING HYBRID WITH CMY

IP65 · COMPACT · PUNCHY · VERSATILE


- Weather-resistant IP65 tour-grade construction
- Advanced optical design delivers groundbreaking luminous efficiency
- Features 180mm front lens and 1.68° narrow beam angle
- Extremely even spot with flawless field consistency
- CRI>90(with CRI enhancement filter)
- 1.68°~50° zoom(20x+)
- 3-wheel CMY (CMY + 15 filters) + CTO
- 1 rotating gobo wheel (8 interchangeable + open) and 1 fixed gobo wheel(18 + open)
- Bi-directional 8-facet and 4-facet prism
- DMX 512 and RDM control

Spot Mode (1.68°)

Distance (m)	20	40	60	80	100
Luminance (Lux)	190000	47500	21100	11870	7600
Diameter(cm)	59	118	177	236	295

Spot Mode (27°)

Distance (m)	3	5	10	15	20
Luminance (Lux)	24800	13140	3285	1460	821
Diameter(cm)	145	241	482	723	964

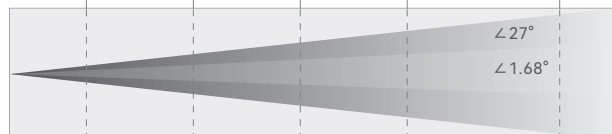


Beam Mode (2.68°)


Distance (m)	10	20	50	70	100
Luminance (Lux)	15600	39200	6272	3200	1560
Diameter(cm)	47	93	234	328	468

Beam Mode (50°)

Distance (m)	3	5	7	10	15
Luminance (Lux)	4050	1458	743	364	162
Diameter(cm)	230	383	536	766	1149

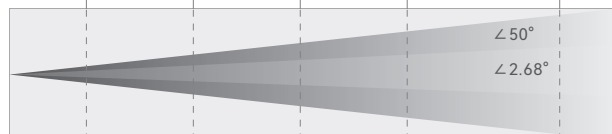

Color

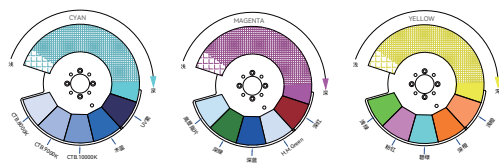


Animation



Roatating Gobo



Fixed Gobo



PHOTOMETRICS

Light Source	660W 6800K arc lamp
Lumen Output	22500Lm (50°)
Output	30400 lux @ 50 meters(1.68°)
CCT	6800K±400
CRI	CRI>90
Lamp Life	3000 hrs
Beam Angle	1.68°~27°(Beam mode) 2.68°~50°(Spot mode)

KEY FEATURES

Pan	540° (16bit resolution)
Tilt	270° (16bit resolution)
Color System	CMY+CTO+color wheel(15+open)
Gobo System	1 fixed gobo wheel (18 + open) 1 rotating gobo wheel (8 + open)
Animation	1 animation wheel
Focus	Electronic focus
Frost	Frost glass
Strobe	0~12Hz
Dimming	0 ~ 100% linear
Prism	Bi-directional, combinable, 8-facet 4-facet prism

CONTROL

Protocol	DMX512/RDM
DMX Channel	32CH
Data Connection	3pin(or 5pin) DMX In/Out linking up to 32pcs
Display	2.0-inch TFT display

POWER

Mains	100 - 240 VAC, 50~60 Hz
Power Connection	True Con In/Out
Consumption	840W@230V
Power Factor	0.96 @230V

PHYSICAL

Operating Tmpt	-20°C~45°C
Cooling	Waterproof noiseless fan
Housing	Power Cable
Dimension	447 x 322 x 820 mm
Weight	34.5 kg
IP Rating	IP65

